

FIG. 1

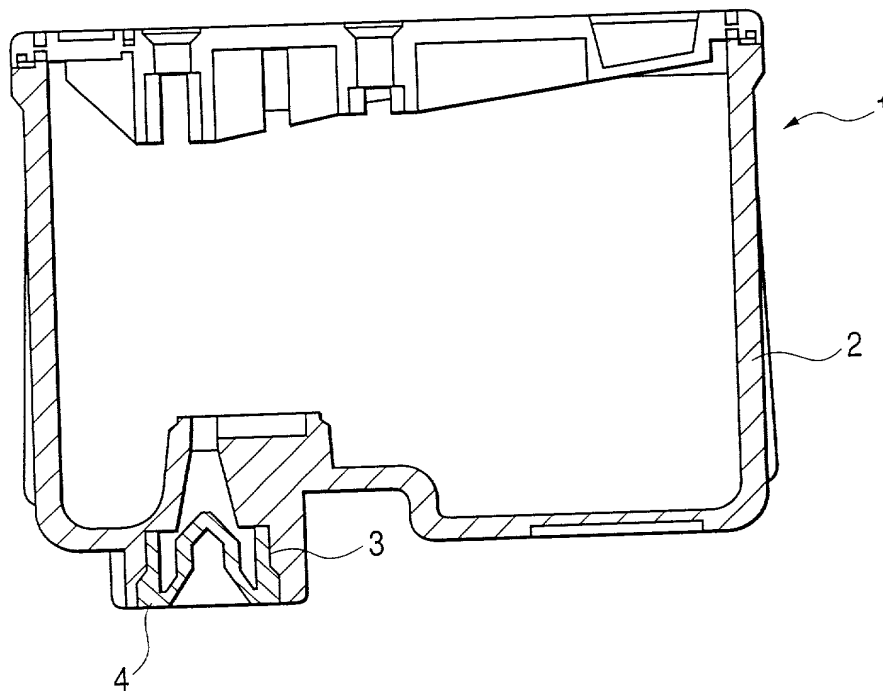


FIG. 2

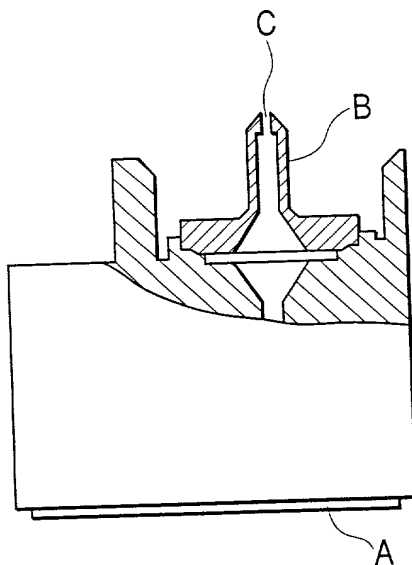


Fig. 1 is a perspective view of a first embodiment of a container. The container includes a lid (4) with a central opening (7) and a flange (6a). The lid is secured by a ring (6b) and a cap (6). The container body (5) is shown below the lid.

A cross-sectional view of a mechanical assembly. A large, hatched component (1) is shown in section, with a central vertical passage. A smaller, hatched component (6) is positioned within this passage. A component labeled B is located to the right of the central passage. A component labeled A is shown at the bottom of the assembly, partially obscured by the hatched components. The diagram illustrates the internal structure and assembly of the device.

FIG. 5 is a perspective view of a device 10. The device 10 has a front face 11 and a side face 12. The front face 11 features a circular opening and a series of small rectangular openings. The side face 12 is a flat surface. The device 10 is shown in a perspective view, highlighting its three-dimensional structure.

477

FIG. 7(a)

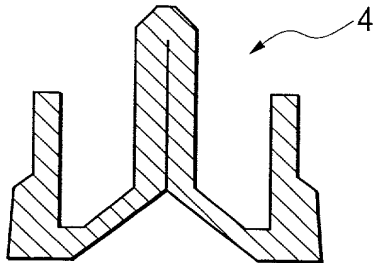


FIG. 7(b)




FIG. 8(a)

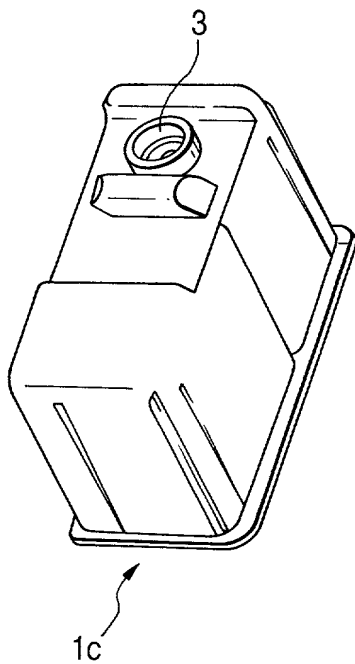


FIG. 8(b)



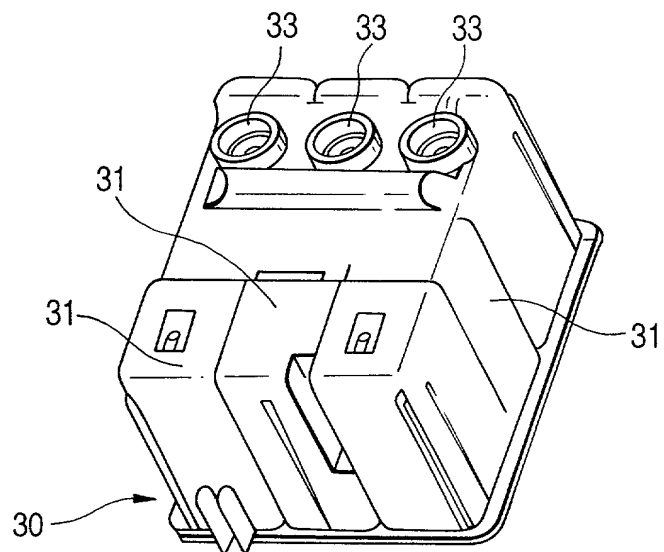


FIG. 9

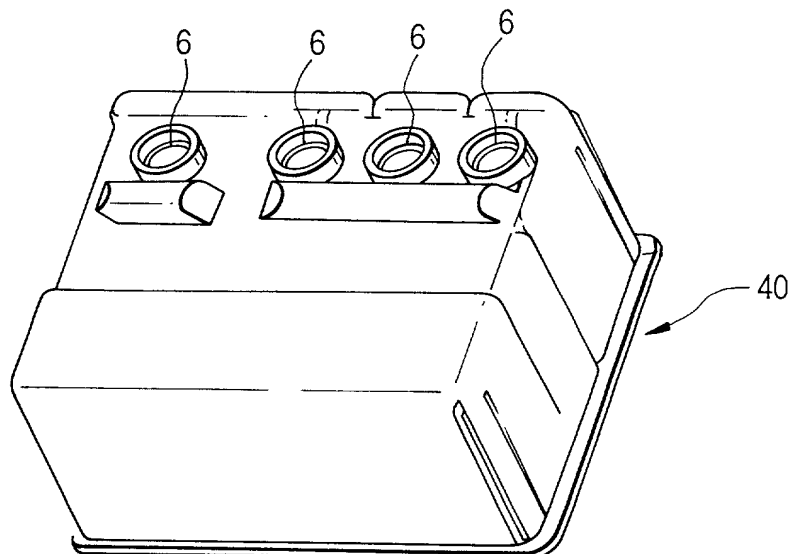

108260-91196860

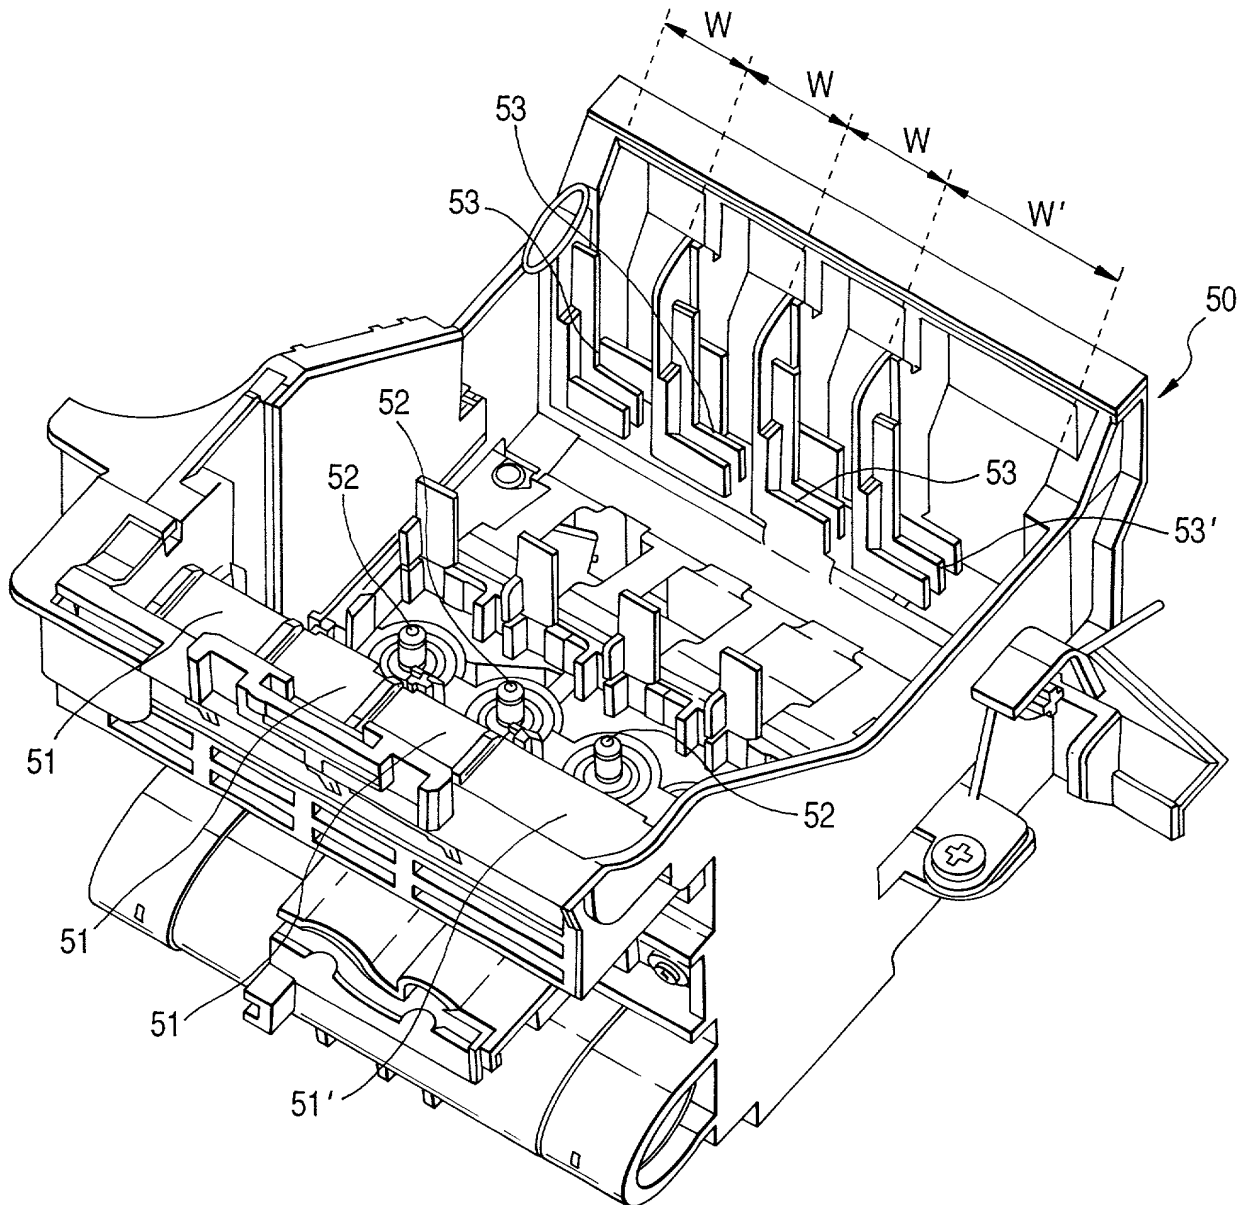

677

FIG. 11


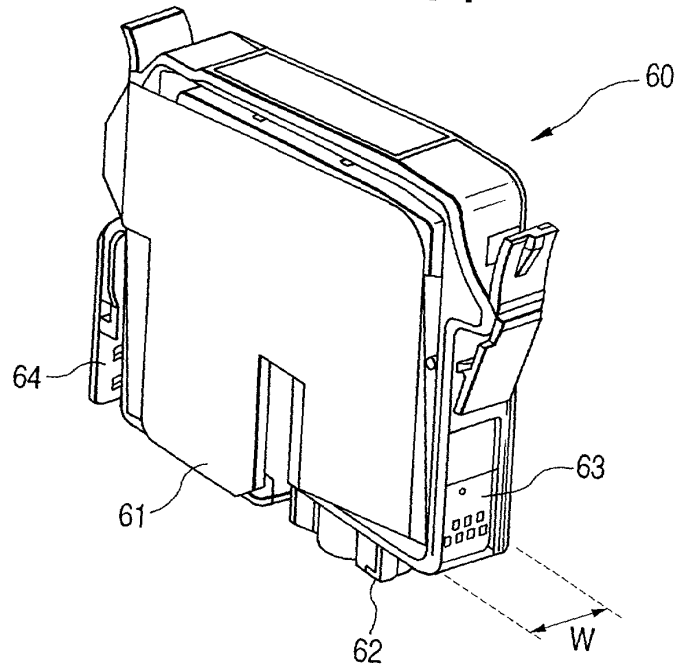


FIG. 12

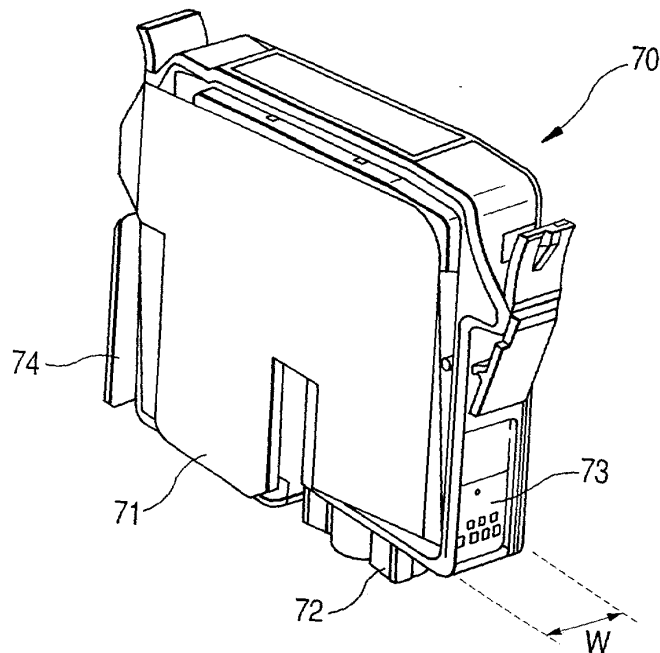

7/7

FIG. 13

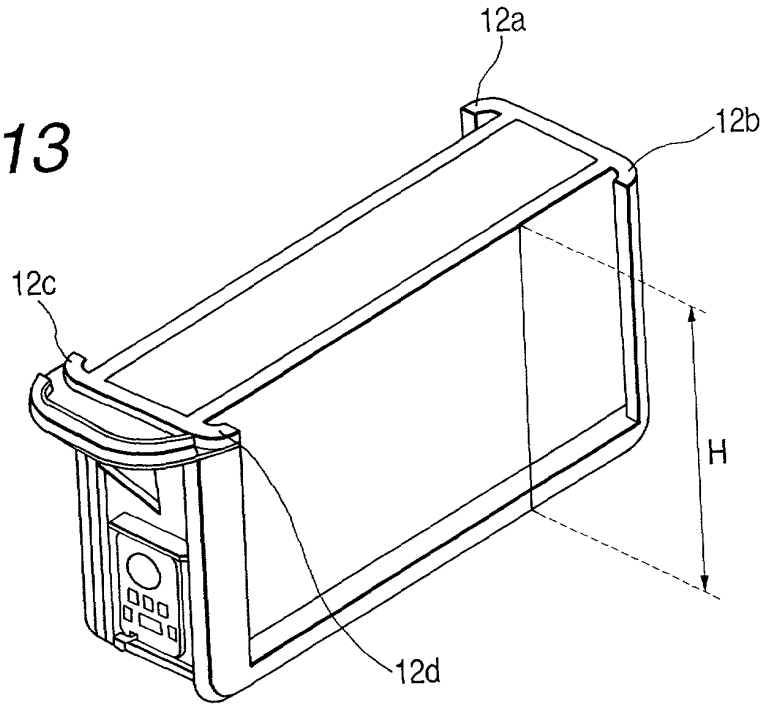


FIG. 14

